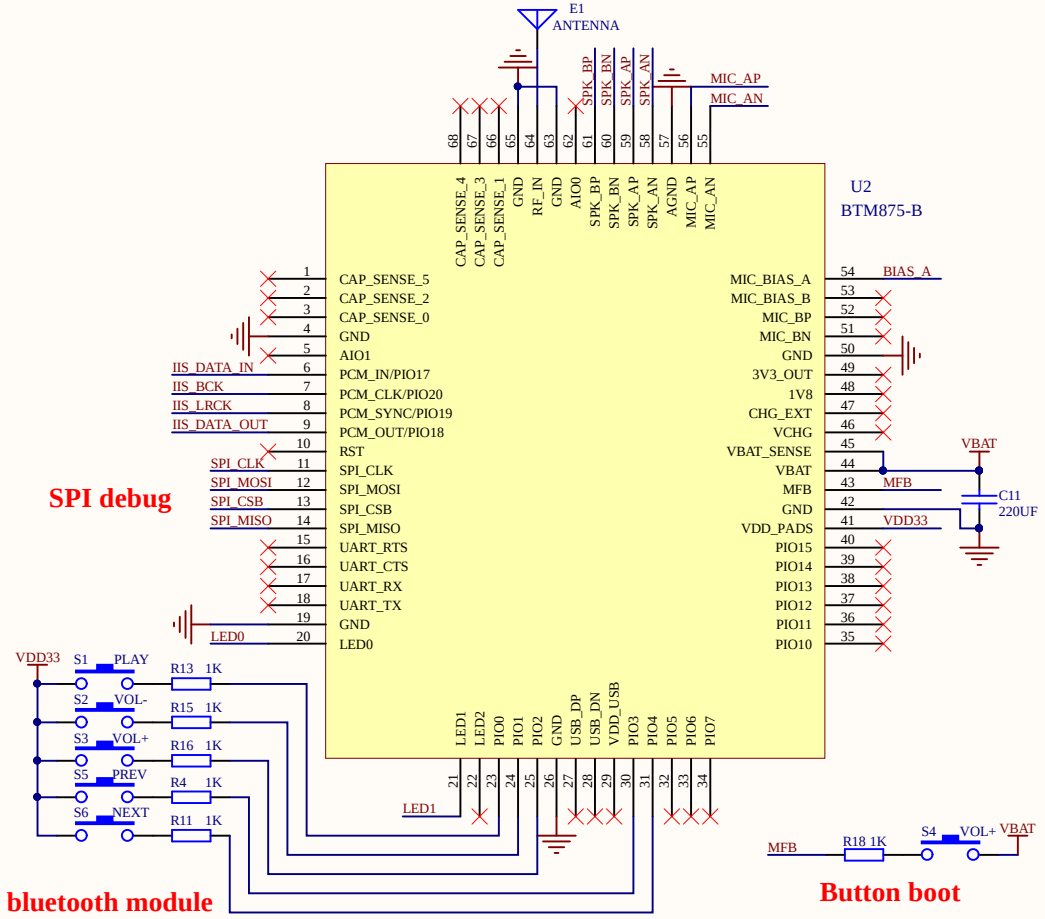

SPI debug

bluetooth module

Button boot

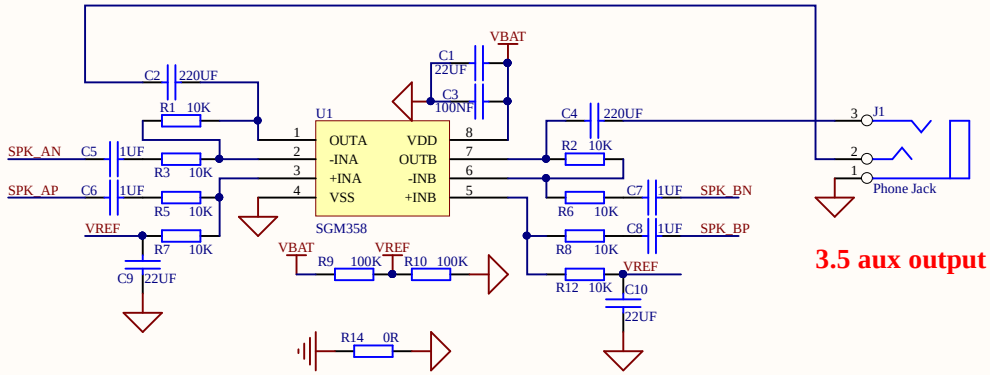

3.5 aux output

Differential to single-ended analog audio output

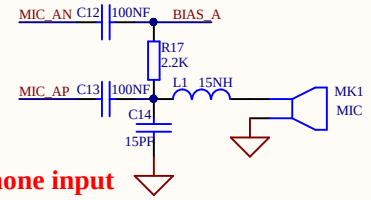

microphone input



LED : led0 red， led1 blue



VBAT voltage： 3.3-4.2V

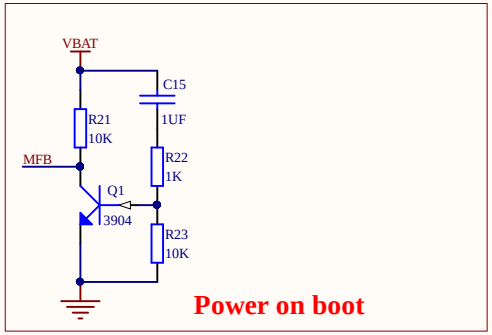

Power on boot

Add delay circuit when power on boot



When SPDIF is output, the output pin is IIS_DATA_OUT

I2S/SPDIF Digital audio output

Title		
Size A4	Number	Revision
Date: 2020-04-13		Sheet of
File: E:\Bluetooth\..\BTM875-B.Sch		Drawn By: